


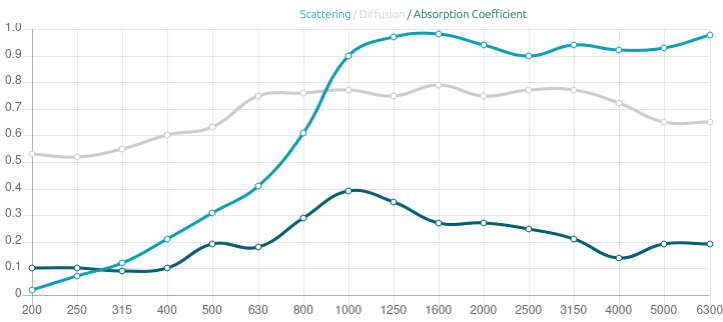


Performance



Technical Information

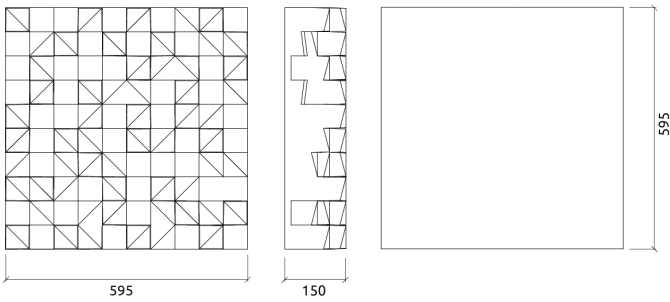

Features

Type: 2D - QRD Diffuser

Scattering range: 630 Hz to 6300 Hz

Available fire rate:
FG | Furniture Grade

Material:
- EPS

Dimensions:

FG | 595x595x150mm | 1.44 Kg

Myron E - Diffuser

In spaces like recording control rooms, sound mastering rooms or other high fidelity listening environments where the sound quality is critical, controlling the bandwidth of diffusion is a priority. Myron E Diffuser was conceived and developed by Artnovion with a specific technical advantage, which allows it to perform way beyond what most of other sound diffusing products are able to deliver. This EPS panel is available in 3 different colours, and is especially easy to install.

Product finishes

(FG) Product Fire Grade - Furniture Grade



FG | (E01) Grigio




FG | (E02) Bianco



FG | (E03) Nero

Myron E - Diffuser

High-Quality diffusion for any room.



Purpose

- Enlarging sweet spot
- Specular reflection control
- Flutter echo control

Recommended for

- Control room
- Recording room
- Home studio
- Broadcast studio
- Drum room

Fixing Systems

Wall & Ceiling



+ [GlueArt 2.0](#)



+ [Instant Fix Kit](#)